


RocketRAID 2522

2 External mini-SAS PCI-e SATA II RAID Controller

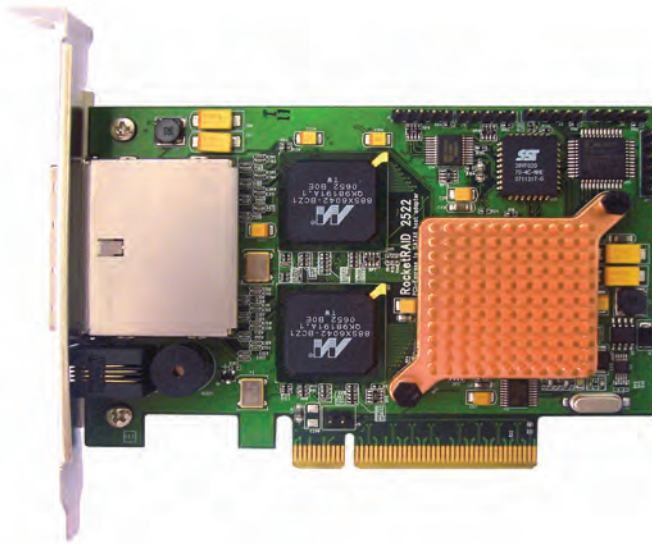

- PCI-e x8 (x16) slot compatible
- Two external mini SAS Ports
- Support 8 hard disks, PM (Port Multiplier) Ready up to 32 Hard Drives
- Active/Failed LED
- SAF-TE (SES2) enclosure management through JP45 connector
- BIOS booting support by 512KB Flash Memory
- Support RAID 0, 1, 5, 10, 50 and JBOD
- Multiple RAID support
- Support Port Multiplier
- Online capacity expansion (OCE) and Online RAID level migration (ORLM)
- Quick and Background initialization for quick RAID configuration
- S.M.A.R.T monitoring hard drive status for reliability
- Automatic unplug/plug detection and rebuild
- Web browser-base RAID management software
- Command Line Interface (CLI)
- SMTP for email notification
- Support over 2TB per volume
- Flash BIOS in OS
- Hot swap and hot plug
- Support Windows, Linux, FreeBSD and Mac OS X

RocketRAID 2522

2 External mini-SAS PCI-e SATA II RAID Controller

External Storage for Video Editing

The RocketRAID 2522 is a multifunctional external SATA RAID Controller designed to meet performance needs of professional video editors.

With dual external mini-SAS connectors the RocketRAID 2522 can support up to 8 hard disks externally or with PM (Port Multiplier) enclosures the RocketRAID 2522 can support up to 40 hard disks externally.

COMPREHENSIVE OS SUPPORT

HighPoint offers the broadest range of support for all major operating systems to ensure OS and hardware server compatibility. Drivers are available for all major operating systems, including Windows , Linux, Mac OS X and FreeBSD.

PHYSICAL SPECIFICATIONS

Size: 120.5mm"L x 84.7mm"W (4.74"L x 3.33"W)

EMI : FCC Part 15 Class B and CE

Thermal and Atmospheric Characteristics:

Work Temperature Range : +5C~+40C

Relative Humidity Range : 20% ~ 80% non condensing

Storage Temperature : -40C to 60C

MTBF: 920,585 Hours

Electrical Characteristics:

PCI-Express: 3.3v

Power: 10W

RocketRAID 2522 Specification

Host Side Interface	PCI-e x8 (x16) compatible
Device Interface	Serial ATA I or II
Number of Channels	2 External mini-SAS port
Allowed Disk Connection	8 SATA I or II Hard Drives
Supported RAID Levels	RAID 0, 1, 5, 10, 50 and JBOD
Operating Systems Support	Windows, Linux, FreeBSD and Mac OS X
RAID Management Tool	BIOS, Web based RAID Management Software and CLI
Some Highlighted Features	Hot swap/hot spare 64bit LBA for over 2TB partition support Drive Activity/Failed LED support SMTP support for email notification OCE/ORLM Automatic RAID Rebuild Online Array Roaming

Company Information

U.S. Headquarter

Address: 1161 Cadillac Ct. Milpitas CA 95035
Phone: 1-408-942-5800
Fax: 1-408-942-5801
E-mail: sales@highpoint-tech.com
Support: support@highpoint-tech.com

HighPoint Taiwan

Address: 5F., No.3, Swei Lane , Jhongheng Rd., Sindian City, Taipei County 231, Taiwan (R.O.C.)
Phone: +886-2-2218-3435
Fax: +886-2-2218-3436
E-mail: sales@highpoint-tech.com
Support: support@highpoint-tech.com

HighPoint China

Address: No. 12, Zhong Guan Cun South Rd, Beijing, China
Phone: +86-10-68918759
Fax: +86-10-68975074
E-mail: sales@highpoint-tech.cn
Support: support@highpoint-tech.cn



Product pictures and specifications are subject to change without notice. All trademarks are the property of their respective holders. Copyright ©2007 by HighPoint Technologies, Inc.

three limited warranty information