


RocketRAID 3220

8 Channel PCI-X SATA II IOP Based RAID Controller

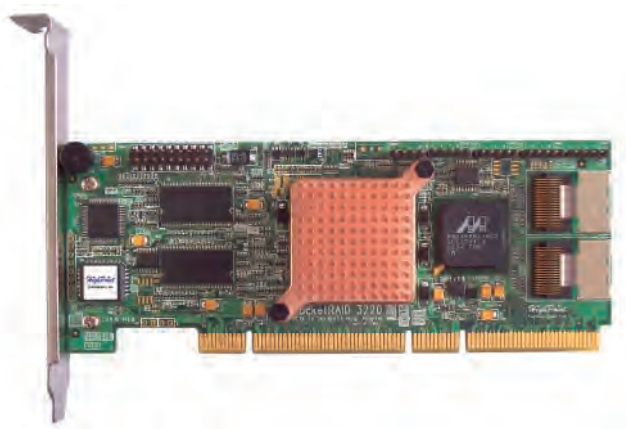

Host Adapter Architecture

- TerabyteStream™ for Blazing Performance
- Intel IOP 80331 (500Mhz)
- PCI-X 64bit@133Mhz
- 128 MB of DDR II memory with ECC protection
- Write through and write back cache
- 8 SATA II channels at 3Gb/s per port
- Multi -adapter support up to 4 adapters
- BIOS booting support
- BIOS PnP and BBS (BIOS boot specification) support
- Intel RAID 6 Engine for large capacity RAID arrays
- RoHS compliant

Advance RAID Features

- TerabyteGuard™ and TerabyteSaver™ for Data Reliability and Protection
- Support RAID 0, 1, 5, 10, 50, 6 and JBOD
- Multiple RAID support
- Multiple Logical Drive Support
- Online array roaming
- Online capacity expansion (OCE) and Online RAID level migration (ORLM)
- Quick and Background initialization for instant RAID configuration
- Automatic drive insertion / removal detection and rebuild
- 64bit LBA support greater than 2TB per volume
- S.M.A.R.T monitoring hard drive status for reliability
- Staggered Spin up with user selection in BIOS
- (MAID) spin down drives when array is idle

Array Monitors, Alerts and Indicators

- Active/Failed LED
- MTP for email notification
- SAF -TE (I2C) enclosure management
- Alarm / Buzzer alerts for array activity

RAID Management

- Firmware update in the Operating System
- Hot key (ctrl-h) boot-up RAID manager via BIOS
- API library for customizing AP
- Command Line Interface (CLI)
- Web browser-base RAID management software
- Disk scrubbing to prevent degraded RAID arrays
- Bad sector repair and remapping to reduce dropped drives
- ATA pass-through mode support

Operating System Support

- Windows 2000
- Windows XP (Home and Pro)
- Windows 2003 Server
- RedHat Linux
- SuSE Linux
- Fedora Core
- Mac OS X 10.4.x (Tiger) and 10.5 (Leopard)
- FreeBSD
- Open Source Driver (GPL Licensed) into Linux Kernel

RocketRAID 3220

8 Channel PCI-X SATA II IOP Based RAID Controller

ROCKETRAID 3220 HOST ADAPTER

The HighPoint RocketRAID 3220 PCI-X SATA II RAID Controller offers the features needed for enterprise level storage environments. The RocketRAID 3220 delivers optimized performance and features through the use of HighPoint's industry-leading RAID technology.

The RocketRAID 3220 is the latest product in storage technology, leveraging the storage performance in SATA II and supporting the fastest available throughput while supporting enterprise level features such as Native Command Queuing (NCQ), staggered drive spin-up and SAF-TE enclosure management support.

Internal Mini-SAS Connectors

The Mini-SAS Interconnect System offers both connectors and cable assemblies that enable flexible speed compatibility for applications ranging from 1.5 to 6.0 Gbps, with capability up to 10.0 Gbps, and is an ideal interconnect solution for the growing server storage market.

Intel 80331 I/O Processor and SDRAM

The RocketRAID 3220 RAID Controller has an integrated hardware I/O processor for RAID 5 parity calculations. With the new I/O processor the system CPU is free to perform other important tasks. There is also 128MB of DDR SDRAM with ECC protection on the RocketRAID 3220 RAID Controller for improved performance and is utilized with the optional battery back up unit for system disasters.

COMPREHENSIVE OS SUPPORT

HighPoint offers the broadest range of support for all major operating systems to ensure OS and hardware server compatibility. Drivers are available for all major operating systems, including Windows, Linux and FreeBSD. Embedded Linux drivers into main Linux kernel help customers easily install and configure the RocketRAID 3220.

PHYSICAL SPECIFICATIONS

Size: 6.574"L x 2.535"W (167.00mm x 64.41mm)

EMI : FCC Part 15 Class B and CE

Thermal and Atmospheric Characteristics:

Work Temperature Range : +5°C ~+ 55°C

Relative Humidity Range : 5% ~ 60% non condensing

Storage Temperature : ~20 ~ 80°C

MTBF: 920,585 Hours

Electrical Characteristics:

PCI/PCI-X+3.3V : 0.9A

Power: 3W

RocketRAID 3220 Specification

Host Side Interface	PCI-X@133MHz
Device Interface	SATA I or SATA II
Number of Channels	2 Internal Mini-SAS
Supported RAID Levels	RAID 0, 1, 5, 6, 10, 50 and JBOD
Operating Systems Support	Windows, Linux and FreeBSD
RAID Management Tool	BIOS Web based RAID Management Software and CLI
Some Highlighted Features	Hot swap/hot spare 64bit LBA for over 4TB partition support Drive Activity/Failed LED support SMTP support for email notification OCE/ORLM Automatic RAID Rebuild Online Array Roaming

Company Information

U.S. Headquarter

Address: 1161 Cadillac Court, Milpitas, CA 95035
Phone: 1-408-942-5800
Fax: 1-408-942-5801
E-mail: sales@highpoint-tech.com
Support: support@highpoint-tech.com

HighPoint Taiwan

Address: 5F, NO.3, Swei Lane, Jungjeng Rd., Shindian City, Taipei, Taiwan 231, R.O.C.
Phone: +886-2-2218-3435
Fax: +886-2-2218-3436
E-mail: sales@highpoint-tech.com
Support: support@highpoint-tech.com

HighPoint China

Address: No. 12, Zhong Guan Cun South Rd, Beijing, China
Phone: +86-10-68918759
Fax: +86-10-68975074
E-mail: sales@microaurora.com.cn
Support: support@microaurora.com.cn



Product pictures and specifications are subject to change without notice. All trademarks are the property of their respective holders. Copyright © 2006 by HighPoint Technologies, Inc.

three limited warranty information