



# **RocketStor 6351A**

Thunderbolt™ 2 Multi-Function Adapter

Quick installation Guide

V1.01

# Table of Contents

<b>1. HighPoint RocketStor 6351A .....</b>	<b>3</b>
<b>2. System Requirements .....</b>	<b>4</b>
<b>3. RocketStor 6351A Hardware .....</b>	<b>4</b>
<b>4. Setup Procedures.....</b>	<b>5</b>
<b>4.1 What's in box.....</b>	<b>5</b>
<b>4.2 Connecting the RocketStor 6351A (RS6351A) .....</b>	<b>6</b>
<b>4.3 Driver installation .....</b>	<b>6</b>
<b>5. Using the Storage disk with RocketStor 6351A... </b>	<b>11</b>
<b>5.1 Initializing new storage under Mac OS X. ....</b>	<b>11</b>
<b>5.2 Initializing new storage under Windows.....</b>	<b>12</b>
<b>6. Support information .....</b>	<b>14</b>

## 1. HighPoint RocketStor 6351A

The RocketStor 6351A Thunderbolt™ 2 Multi-Function Adapter is the industry's most versatile Thunderbolt™ connectivity solution!

- **Ready for High-Speed Storage & Peripherals** - 2x 5Gb/s USB 3.0 ports + 1x 6Gb/s eSATA ports
- **Daisy Chain** - Dual Thunderbolt™ 2 ports support up to 6 Thunderbolt™ devices.
- **Integrated Audio Ports** - Support headphones, speakers and headsets.
- **Built-in Gigabyte Ethernet port** - Share devices over your local network or internet connection!

## 2. System Requirements


- A. Apple Mac or PC System with Thunderbolt™ support
- B. Operating System:
  - Mac OS X 10.9 or higher
  - Windows 7 or higher

## 3. RocketStor 6351A Hardware

Front side:



## Back side: RocketStor 6351A

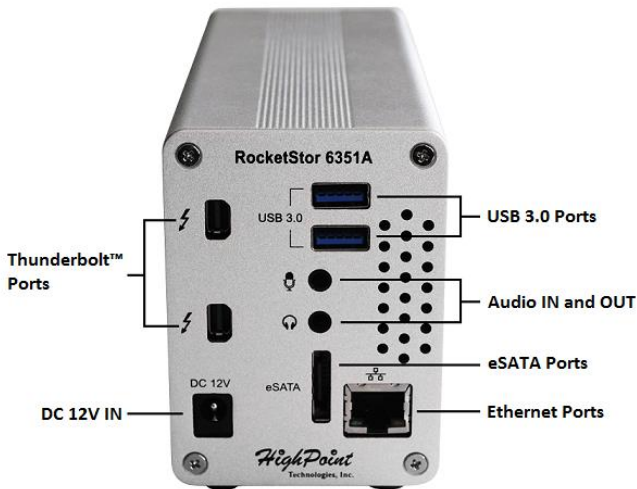

## 4. Setup Procedures

### 4.1 What's in the box

- RocketStor 6351A
- Power Adapter
- Quick Installation Guide

## 4.2 Connecting the RocketStor 6351A (RS6351A)

### Steps:

- 1) Connect the Power Adapter to the RocketStor 6351A.
- 2) Connect the RocketStor 6351A to the host system using a Thunderbolt™ cable.


## 4.3 Driver installation

### 1) Driver Installation: Mac OS X

OS X includes driver support for the RocketStor 6351A and will automatically recognize the device after booting up.

To verify the RS6351A driver status;

Click the Apple icon on top left of the screen, and select **About This Mac**, and then select **More Info**. Next, select **System Report**, and click **Thunderbolt** on left side of the **System Information** pane. The RocketStor 6351A device should be list under **Thunderbolt Bus**:

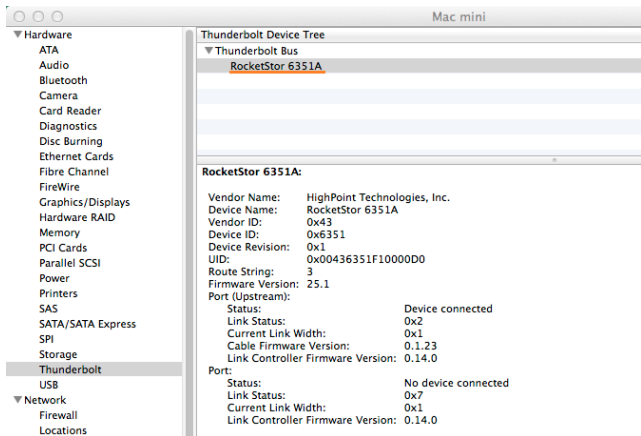


## 2) Enable the Apple device charging support


RocketStor 6351A can support Apple iPhone or iPad device charging under Mac OS X. To enable the device charging, it is required to install the driver. Please visit

[http://www.highpoint-tech.com/USA\\_new/series\\_RS6351A-resources.htm](http://www.highpoint-tech.com/USA_new/series_RS6351A-resources.htm), download and install the **HighPoint RocketStor 6351A Charging Support driver**:

- Double click the .dmg file to extract the package.
- Double click the .mpkg package to start the installation

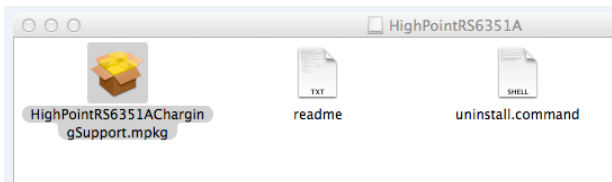

- c. Follow the on screen instruction to complete the driver install.

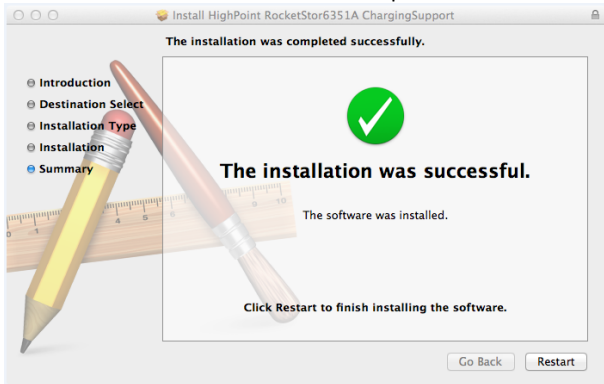


- d. Once the installation is completed, the RocketStor 6351A can support Apple device installation now.

### 3) Driver Installation: Windows

- Boot up the Windows operating system.
- Make sure the host system's Thunderbolt™ driver has been installed.
- Open Windows **Device Manager** and verify the RS6351A has been detected. Device Manager should display one ACHI controller, one Intel I210 Network



adapter, one USB audio controller and two USB 3.0 controller as shown below:

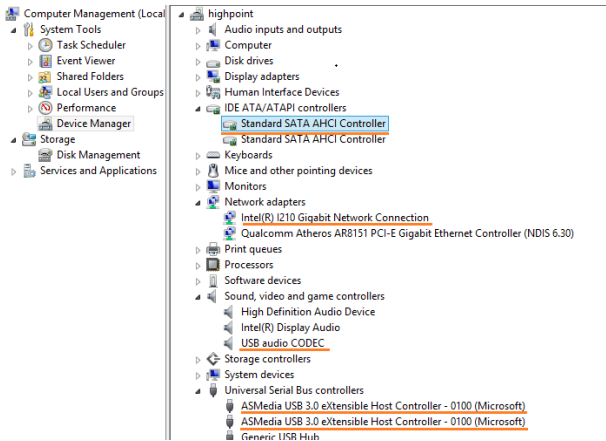

- d. Please visit [http://www.highpoint-tech.com/USA\\_new/series\\_RS6351A-resources.htm](http://www.highpoint-tech.com/USA_new/series_RS6351A-resources.htm) for the latest Windows driver package. Download and unzip the driver package.

Name	Date modified	Type
Readme	4/11/2014 9:06 AM	Text Document
setup	4/9/2014 3:59 PM	Application

- e. Double click the setup program and follow the on screen instruction to complete the installation.




## 5. Using eSATA and USB drives with the RocketStor 6351A

Any previously used eSATA/USB disk attached to the RS6351A will be recognized automatically.

### 5.1 Initializing new storage under Mac OS X.

- 1) After a new disk is installed, OS X will display a pop-up window with options to initialize, Ignore or Eject. Click **Initialize** to open Disk Utility.

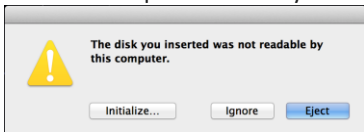

- 2) Select the target volume and click the **Erase** tab. Enter a name in the **Name:** field, and click the **Erase** button towards the bottom right-hand corner, to format the disk.




- 3) After the new storage drive is erased, the new storage volume icon will be found on the desktop and **finder** as a new disk volume.




## 5.2 Initializing new storage under Windows


- 1) After a new disk is installed, open the Windows Disk Management utility. Right click the new disk and select **Initialize Disk**.

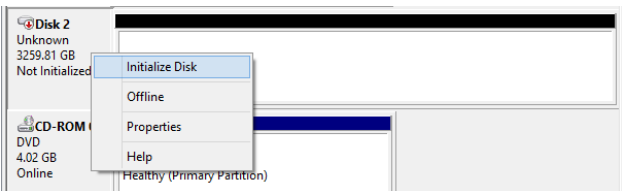

## 2) Create and format new partition on the new disk.

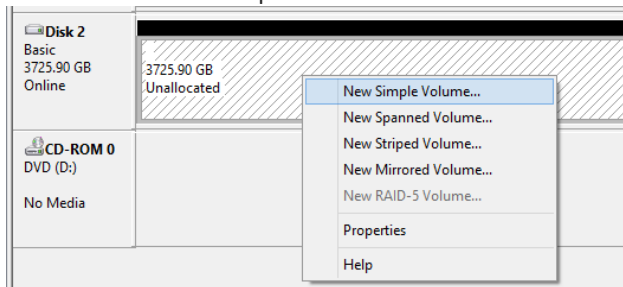

After the New partition is formatted, the new storage drive can be found under My Computer.

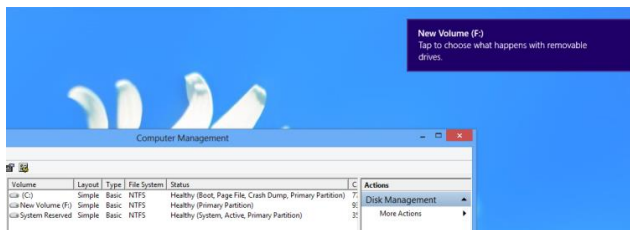

**Note:** The RS6351A supports Thunderbolt™ power management. While the RS6351A is connected to the host system using the Thunderbolt™ cable, shutting down the host will automatically power down the RS6351A.

## 6. Support information

If you encounter any problems while utilizing the HighPoint RocketStor 6351A, or have any questions about this or any other HighPoint Technologies, Inc. product, feel free to contact our Customer Support Department.

Web Support: <http://www.highpoint-tech.com/websupport/>

Thunderbolt Support:

Phone: (408)240-6108

Skype: HighPoint.Thunderbolt

*Dec. 11, 2014*

*© Copyright 2014 HighPoint Technologies, Inc. All right reserved.*